



特点:

- 支持 Intel® 6~9th Generation Core/Pentium/Celeron Desktop CPU
- 全套模具成型, 标准 19 英寸 2U 上架式机箱
- 安装标准 ATX 主板, 支持标准 2U 电源
- 最多支持 7 槽位半高卡扩展, 满足多行业应用需求
- 人性化设计, 机箱前置系统风扇免工具维护
- 最多可选 4 个 3.5 英寸抗震抗冲击硬盘位
- 前面板 USB、开关机设计, 电源及存储状态显示, 更易于系统维护



远程管理



状态监控



远程运维




安全控制


产品规格

Model	IPC200-H31C	
Processor System	CPU	Support Intel® 6/7/8/9th Generation Core / Pentium/ Celeron Desktop CPU
	TDP	65W
	Socket	LGA1151
	Chipset	H310C
	BIOS	AMI 256 Mbit SPI
Memory	Socket	2 * Non-ECC U-DIMM Slot, Dual Channel DDR4 up to 2666MHz
	Capacity	64GB, Single Max. 32GB
Graphics	Controller	Intel® UHD Graphics
Ethernet	Controller	1 * Intel i210-AT GbE LAN Chip (10/100/1000 Mbps, RJ45) 1 * Intel i219-LM/V GbE LAN Chip (10/100/1000 Mbps, RJ45)
	Storage	SATA M.2
Expansion Slots	PCIe	1 * PCIe x16 slot (Gen 3, x16 signal) 1 * PCIe x4 slot (Gen 2, x4 signal, Default, co-lay with Mini PCIe)
	PCI	5 * PCI slot
	Mini PCIe	1 * Mini PCIe (PCIe x1 Gen 2 + USB2.0 (Opt., co-lay with PCIe x4 slot), with 1 * SIM Card)
	Front I/O	Ethernet
Front I/O	USB	4 * USB3.2 Gen 1x1 (Type-A) 2 * USB2.0 (Type-A)
	PS/2	1 * PS/2 (Keyboard & Mouse)
	Display	1 * DVI-D: max resolution up to 1920*1200 @ 60Hz 1 * HDMI1.4: max resolution up to 3840*2160 @ 30Hz
	Audio	3 * 3.5mm Jack (Line-out + Line-in + MIC)
	Serial	2 * RS232/422/485 (COM1/2, DB9/M, Full Lanes, BIOS Switch)
	Rear I/O	USB
Button		1 * Power Button
LED		1 * Power status LED 1 * Hard drive status LED
Internal I/O	USB	1 * USB2.0 (Vertical TYPE-A)
	COM	4 * RS232 (COM3/4/5/6, Header, Full Lanes)
	Display	1 * VGA: max resolution up to 1920*1200 @ 60Hz (wafer) 1 * eDP: max resolution up to 1920*1200 @ 60Hz (Header)
	Audio	1 * Front Audio (Line-Out + MIC, Header) 1 * Speaker (3W (per channel) into a 4Ω Loads, wafer)
	GPIO	1 * 16 bits DIO (8DI and 8DO, wafer)
	SATA	3 * SATA 7P Connector
	LPT	1 * LPT (Header)
	FAN	2 * SYS FAN (Header) 1 * CPU FAN (Header)
Power Supply	Type	2U FLEX
	Power Input Voltage	AC power supply, voltage and frequency shall be based on the 2U FLEX power supply provided
	RTC Battery	CR2032 Coin Cell
OS Support	Windows	6/7th Core™: Windows 7/10/11 8/9th Core™: Windows 10/11
	Linux	Linux
Watchdog	Output	System Reset
	Interval	Programmable 1 ~ 255 sec
Mechanical	Enclosure Material	SGCC+AL6061
	Dimensions	482.6mm(L) * 464.5mm(W) * 88.1mm(H)
	Mounting	Rack-mounted/Desktop
Environment	Operating Temperature	0 ~ 50°C
	Storage Temperature	-20 ~ 70°C
	Relative Humidity	10 to 95% RH (non-condensing)

产品尺寸

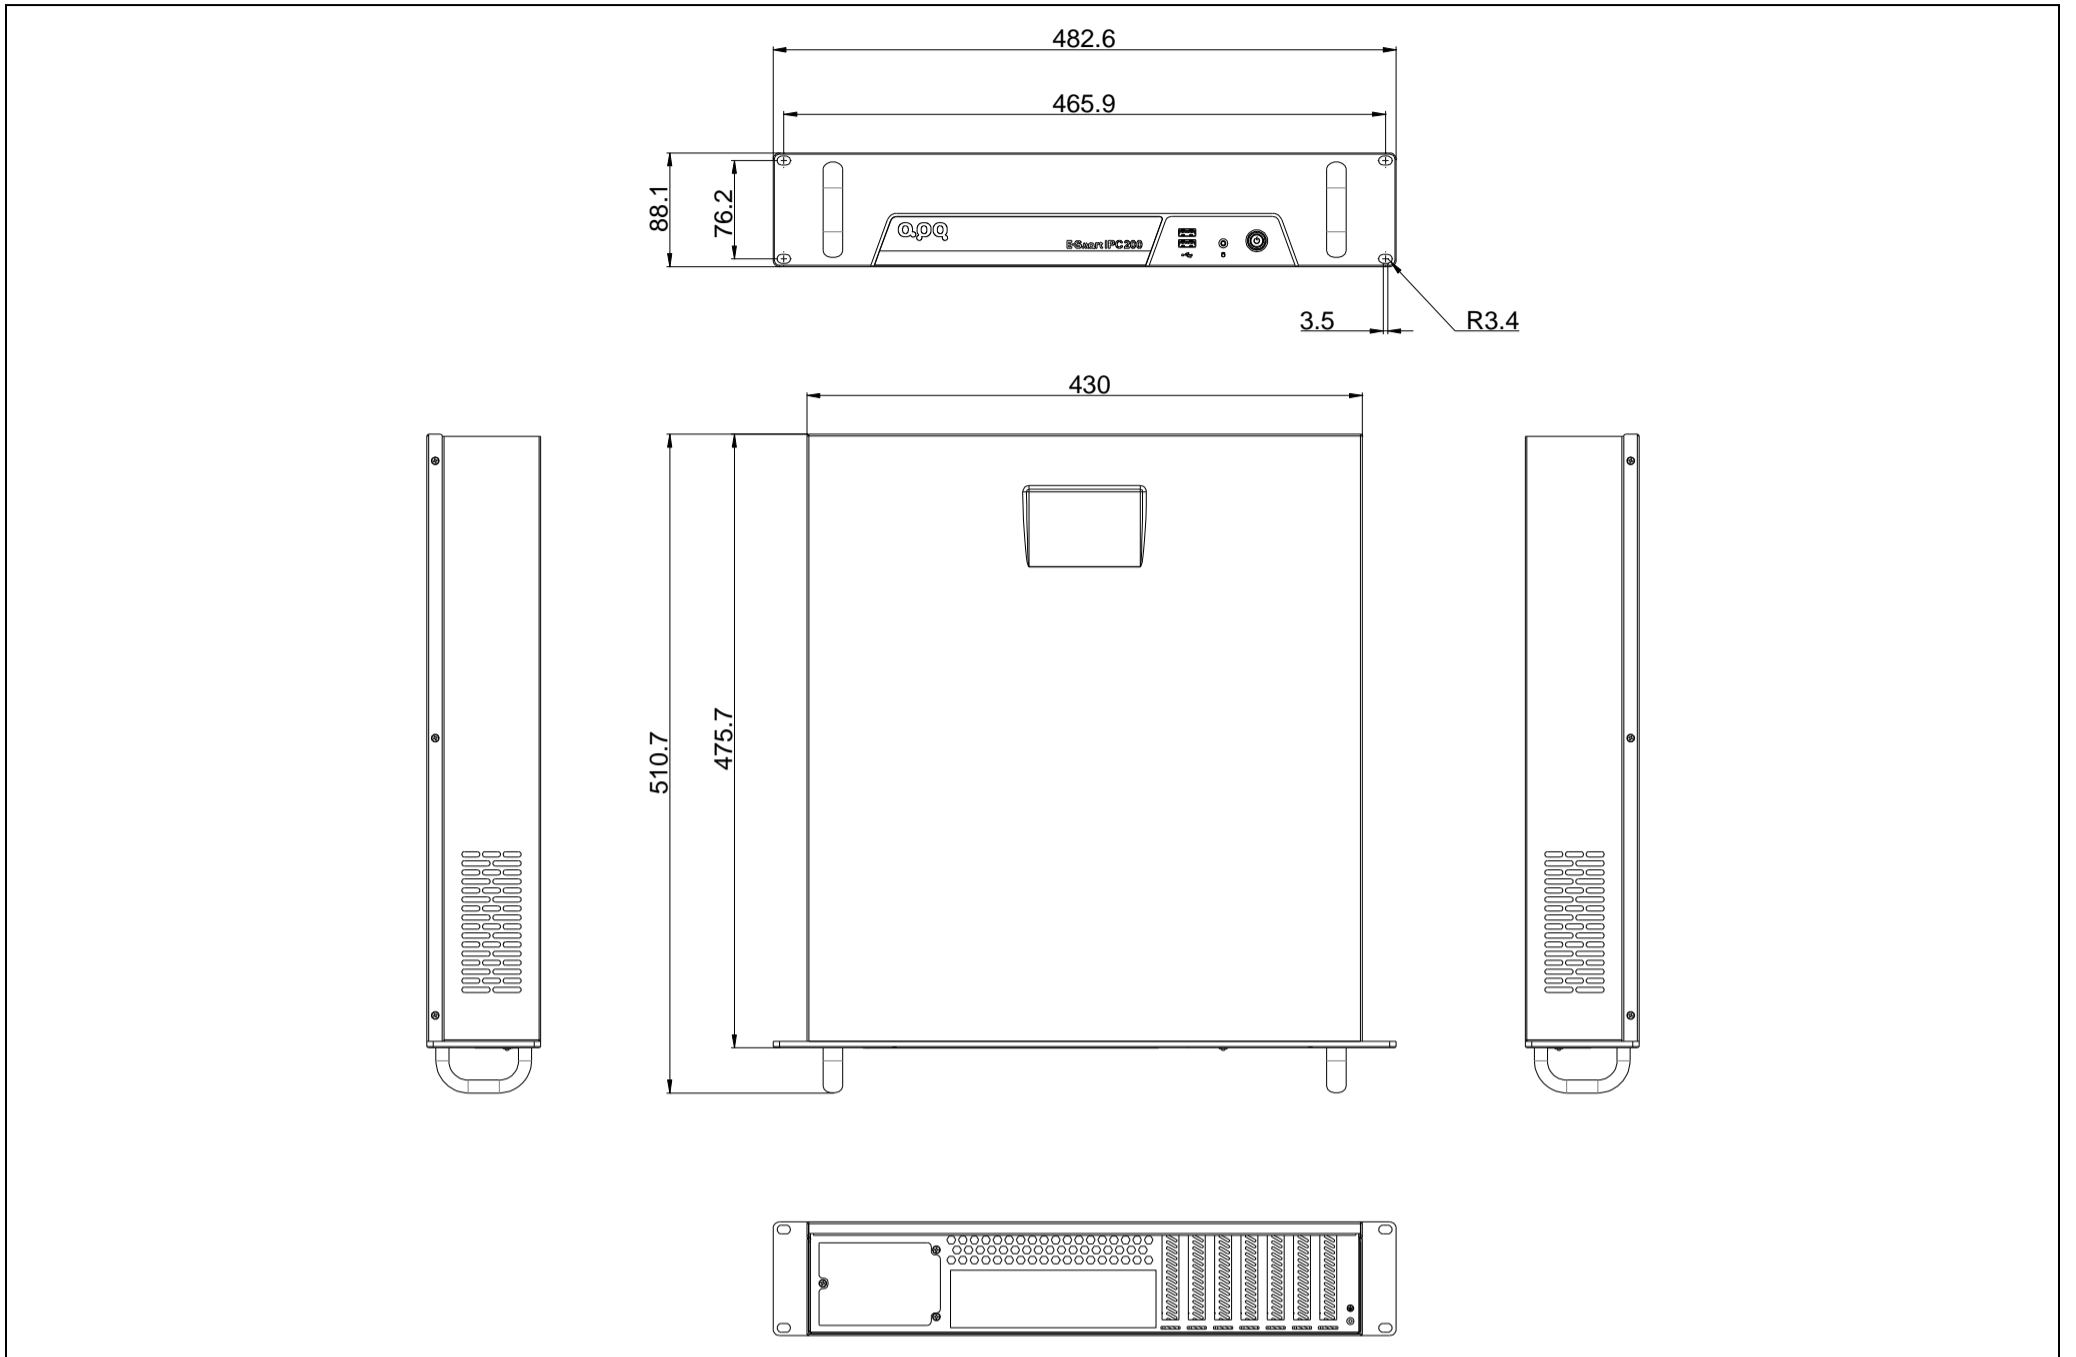

机箱接口

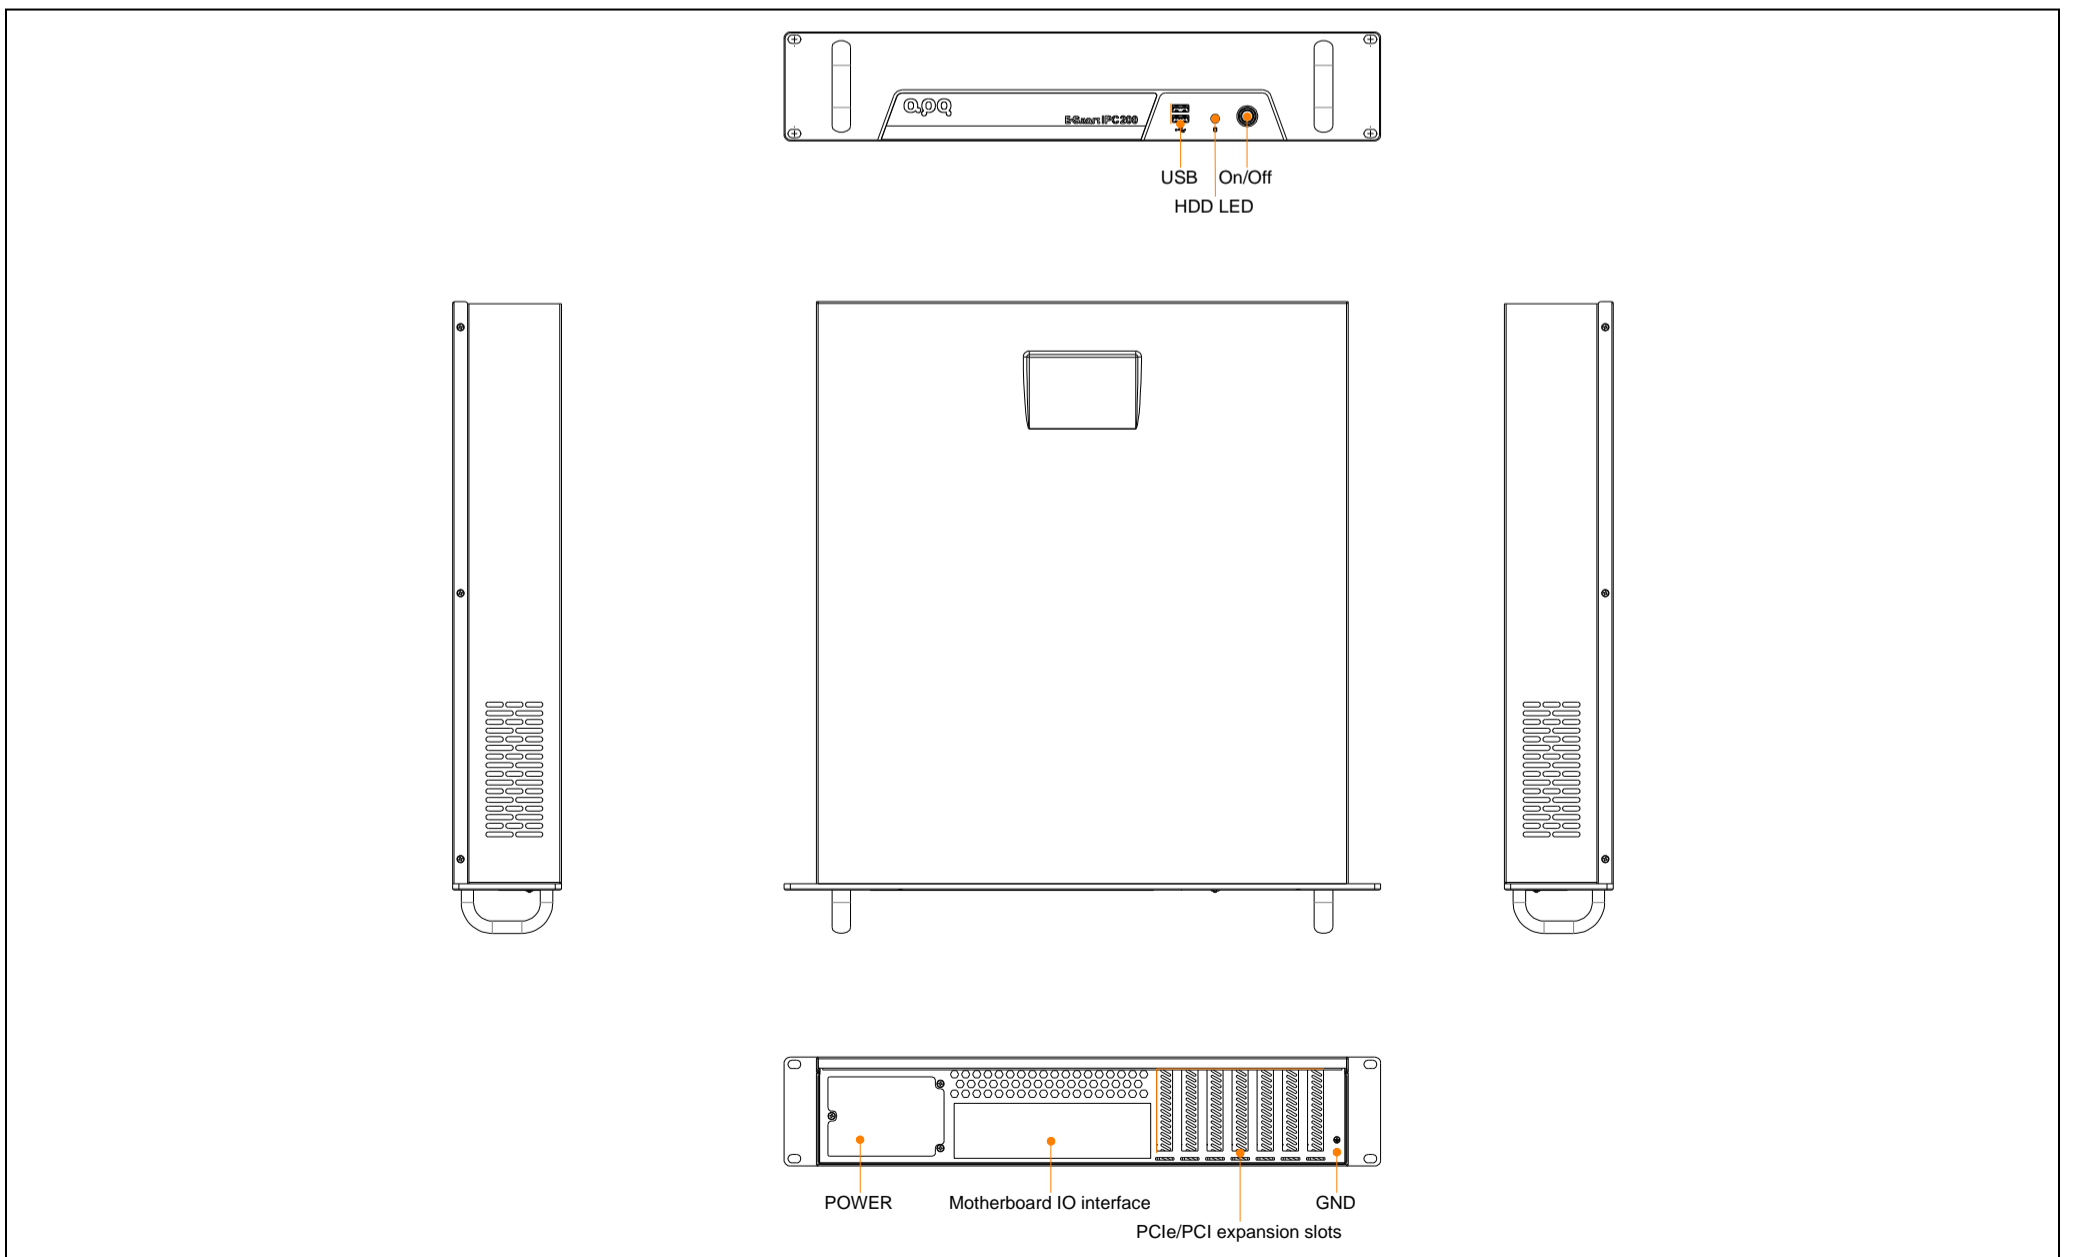

主板接口

